

# RW-M6.1



- ◆ **Safer**

Cobalt Free Lithium Iron Phosphate (LFP) Battery, safety and long lifespan, high efficiency and high-power density. Intelligent BMS, providing complete protection.

- ◆ **Reliable**

Support high discharge power. IP65, natural cooling, wide temperature range: -20°C to 55°C.

- ◆ **Flexible**

Modular design, easy to expand, Max. 32 units in parallel, Max. capacity of 196kWh. Suited to residential and commercial applications for increasing the self-consumption ratio.

- ◆ **Convenient**

Battery module auto networking, Automatic IP addressing, easy maintenance, remotely monitoring and upgrade, support USB drive upgrade the firmware.

- ◆ **Eco-Friendly**

Use environmental protection materials, the whole module non-toxic, pollution-free.

- ◆ **Wall-Mounted**

Flat design, wall-mounted, saving installation space.

| Model                              |                          | RW-M6.1  |
|------------------------------------|--------------------------|--|
| <b>Main Parameter</b>              |                          |  |
| Battery Chemistry                  |                          | LiFePO4  |
| Capacity (Ah)                      |                          | 120  |
| Scalability                        |                          | Max.32 pcs in Parallel(196kWh)                               |
| Nominal Voltage (V)                |                          | 51.2   |
| Operating Voltage(V)               |                          | 43.2~57.6  |
| Energy (kWh)                       |                          | 6.14   |
| Usable Energy (kWh) <sup>[1]</sup> |                          | 5.53   |
| Charge/Discharge Current (A)       | Recommend <sup>[2]</sup> | 60   |
|                                    | Max. <sup>[2]</sup>      | 100  |
|                                    | Peak(2mins,25°C)         | 150  |
| <b>Other Parameter</b>             |                          |  |
| Recommend Depth of Discharge       |                          | 90%  |
| Dimension (W/H/D, mm)              |                          | 475*720*145(Without Base, depth of 161mm with Hanging Board) |
| Weight Approximate(kg)             |                          | 58   |
| Master LED Indicator               |                          | 5LED(SOC:20%~SOC100%),3LED (working, alarming, protecting)   |
| IP Rating of Enclosure             |                          | IP65   |
| Operating Temperature              |                          | Charge:0~55°C / Discharge:-20°C~55°C                         |
| Storage Temperature                |                          | 0°C~35°C   |
| Humidity                           |                          | 5%~95%   |
| Altitude                           |                          | ≤2000m   |
| Cycle Life                         |                          | ≥6000(25°C±2°C,0.5C/0.5C,70%EOL)                             |
| Installation                       |                          | Wall-Mounted, Floor-Mounted                                  |
| Communication Port                 |                          | CAN2.0, RS485  |
| Warranty Period <sup>[3]</sup>     |                          | 10 years   |
| Energy Throughput <sup>[3]</sup>   |                          | 20MWh@70%EOL   |
| Certification                      |                          | UN38.3, IEC62619, CE, CEI 0-21                               |

[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] The warranty is due whichever reached first of warranty period or energy throughput.


## Introduction

This series lithium iron phosphate battery is one of new energy storage products developed and produced by Deye , it can be used to support reliable power for various types of equipment and systems.


This series is especially suitable for application scene of high power, limited installation space, restricted load-bearing and long cycle life.

This series has built-in BMS battery management system, which can manage and monitor cells information including voltage, current and temperature. What's more, BMS can balance cells charging and discharging to extend cycle life. Multiple batteries can connect in parallel to expand capacity and power in parallel for larger capacity and longer power supporting duration requirements.

| Model          | Accessories Parts Description        | Remark   |
|----------------|--------------------------------------|--|
| RW-M6.1-Hboard | Battery Hanging Board<br>(Included)  | Used for battery fixing on the wall                                |
| RW-M6.1-PCable | Hybrid inverter Cable<br>(Included)  | Battery power and communication cable connect with hybrid inverter |
| RW-M6.1-BCable | Battery Parallel Cable<br>(Optional) | Battery power and communication parallel connection cable          |



**Model: RW-M6.1-Hboard**  
**Details: 3kg(Appr.)**

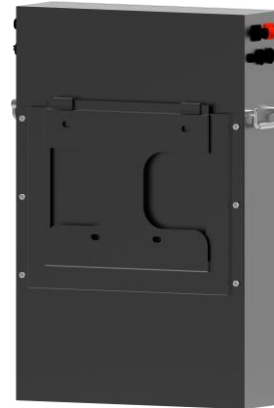

**Model: RW-M6.1-PCable**

**Details:** Pair of 4AWG DC power cable and RJ45 communication cable connect with hybrid inverter, **one end has a waterproof terminal**. The cable length can be customized based on customer requirements, default length is 1500mm.



**Model: RW-M6.1-BCable**

**Details:** Pair of 4AWG Battery power cable and RJ45 communication cable for battery parallel, **both ends have waterproof terminals**. The cable length can be customized based on customer requirements, default length is **600mm**.